



Model WL72-HD-LPG Headed Industrial Transporter



Specifications

Dimensions

Length	20 feet / 6096 mm
Width	8 feet / 2438 mm
Height – Lowered	27 in / 686 mm
Height – Raised	37 in / 940 mm
Travel Height	32 in ± 4 in / 813 mm ± 102 mm
Load Deck Dimensions	
Length	16 feet / 4877 mm
Width	8 feet / 2438 mm
Suspension	Hydraulic

Weights

Transporter Empty Weight	18,000 lb / 8,165 kg
Transporter Loaded Weight	162,000 lb / 73,482 kg
Rated Capacity	144,000 lb / 65,317 kg

Engine

Type	LPG
Displacement	350 cu in / 5.7 L
Cylinders	8
Cooling	Liquid

Drive System

Number of Uniload [®] Wheel Modules	4
Wheel Diameter	18 in / 457 mm
Wheel Width	7.5 in / 191 mm
Propulsion	AC Servo
Steering	SynchroSteer [®] Joystick Control

Speeds

Empty	0 – 100 fpm / 30.5 mpm
Loaded	0 – 70 fpm / 21.4 mpm
Raise (maximum)	5.0 in per min (127 mmpm)
Lower (maximum)	5.0 in per min (127 mmpm)


Environmental Conditions

Maximum Operating Temperature	110° F / 43° C
Minimum Operating Temperature	20° F / -7° C
Relative Humidity	0 - 100%
Maximum Slope	4%

Omni-Directional Steering Modes

Normal (All Wheel Steering)

Travel forward and reverse parallel to the transporter's long axis. Front wheels steer $\pm 30^\circ$. Rear wheels steer opposite direction of front.



Lateral (All Wheel Steering)

Travel forward and reverse parallel to the transporter's short axis. Front wheels steer $\pm 30^\circ$. Rear wheels steer opposite direction of front.



Normal Diagonal

Travel forward and reverse at an angle to the transporter's short axis. Front and rear wheels steer together.




Lateral Diagonal

Travel forward and reverse at an angle to the transporter's long axis. Front and rear wheels steer together.




Rotate

All modules align axle centerlines to theoretical center of transporter. Rotate clockwise or counter-clockwise about the center of the transporter.



RotatePLUS

All modules align axle centerlines to a point along the transporter's short axis. Rotate clockwise or counter-clockwise about transporter's short axis.

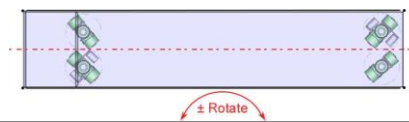

Machine Controller

Beckhoff Industrial PC TwinCAT ladder logic running Doerfer's SynchroSteer® control software.

Operator Interface

Wireless bellipak radio joystick control with Beckhoff color touch screen HMI (Human Machine Interface).

Specifications subject to change without notice

REV.01 JANUARY 2013

Authorized Wheelift Representative